

rok założenia 1989

Wszystko do basenów

📍 03-455 Warszawa, ul. Namysłowska 8 📞 22 618 15 03 📠 22 618 41 97



Rely on it.

RENOLIT ALKORPLAN TOUCH/CERAMICS/2000/3000

Reinforced pool membrane for on site lining



<https://wszystkodobasenow.pl/folia-basenowa-alkorplan.html>

Make your
swimming pool
fashionable

www.renolit.com/swimmingpool
www.alkorplan.info


If you want an attractive pool that will give you no problems, **RENOLIT ALKORPLAN** reinforced liner is the perfect product to achieve this

Reinforced membranes are the most widely-used pool liners in the world



With **RENOLIT ALKORPLAN** this won't happen ...!

- It can be installed on any surface.
- Clean installation, with no noise and in half the time it takes to install other liners.
- It requires practically no maintenance.
- No matter the size and shape of the pool.



We offer you
the pool of
your dreams

No matter what
your garden looks like
RENOLIT ALKORPLAN
allows you to create
a unique, customised
area just for you.

RENOLIT ALKORPLAN makes your dreams come true.

Our pool liners convert even the most modest pool into the centre of attraction in your garden, regardless of its size or its location.

RENOLIT ALKORPLAN and its many options help you create a unique and exclusive setting for your enjoyment.

RENOLIT ALKORPLAN is the perfect liner for rooftop pools, basement pools or any place where there are cracks or micro pores that could cause dampness, water leaks or flooding.

How many reinforced pool liners are able to overcome this test?



**GUARANTEE
WATERTIGHTNESS**

10 YEARS

RENOLIT ALKORPLAN allows you to enjoy your pool in peace, without worrying about leaks.

The perfect
solution for
large pools


The ideal lining
for both commercial
and residential
pools

Many hotel pools, Olympic pools or aquatic park pools in Europe have RENOLIT ALKORPLAN liners installed in them, as apart from requiring minimum maintenance, they guarantee complete watertightness and it is possible to install them in half the time it takes to install other systems.



Although the installation of RENOLIT ALKORPLAN is fast and easy, it should always be installed by qualified professionals to ensure a completely watertight finish.



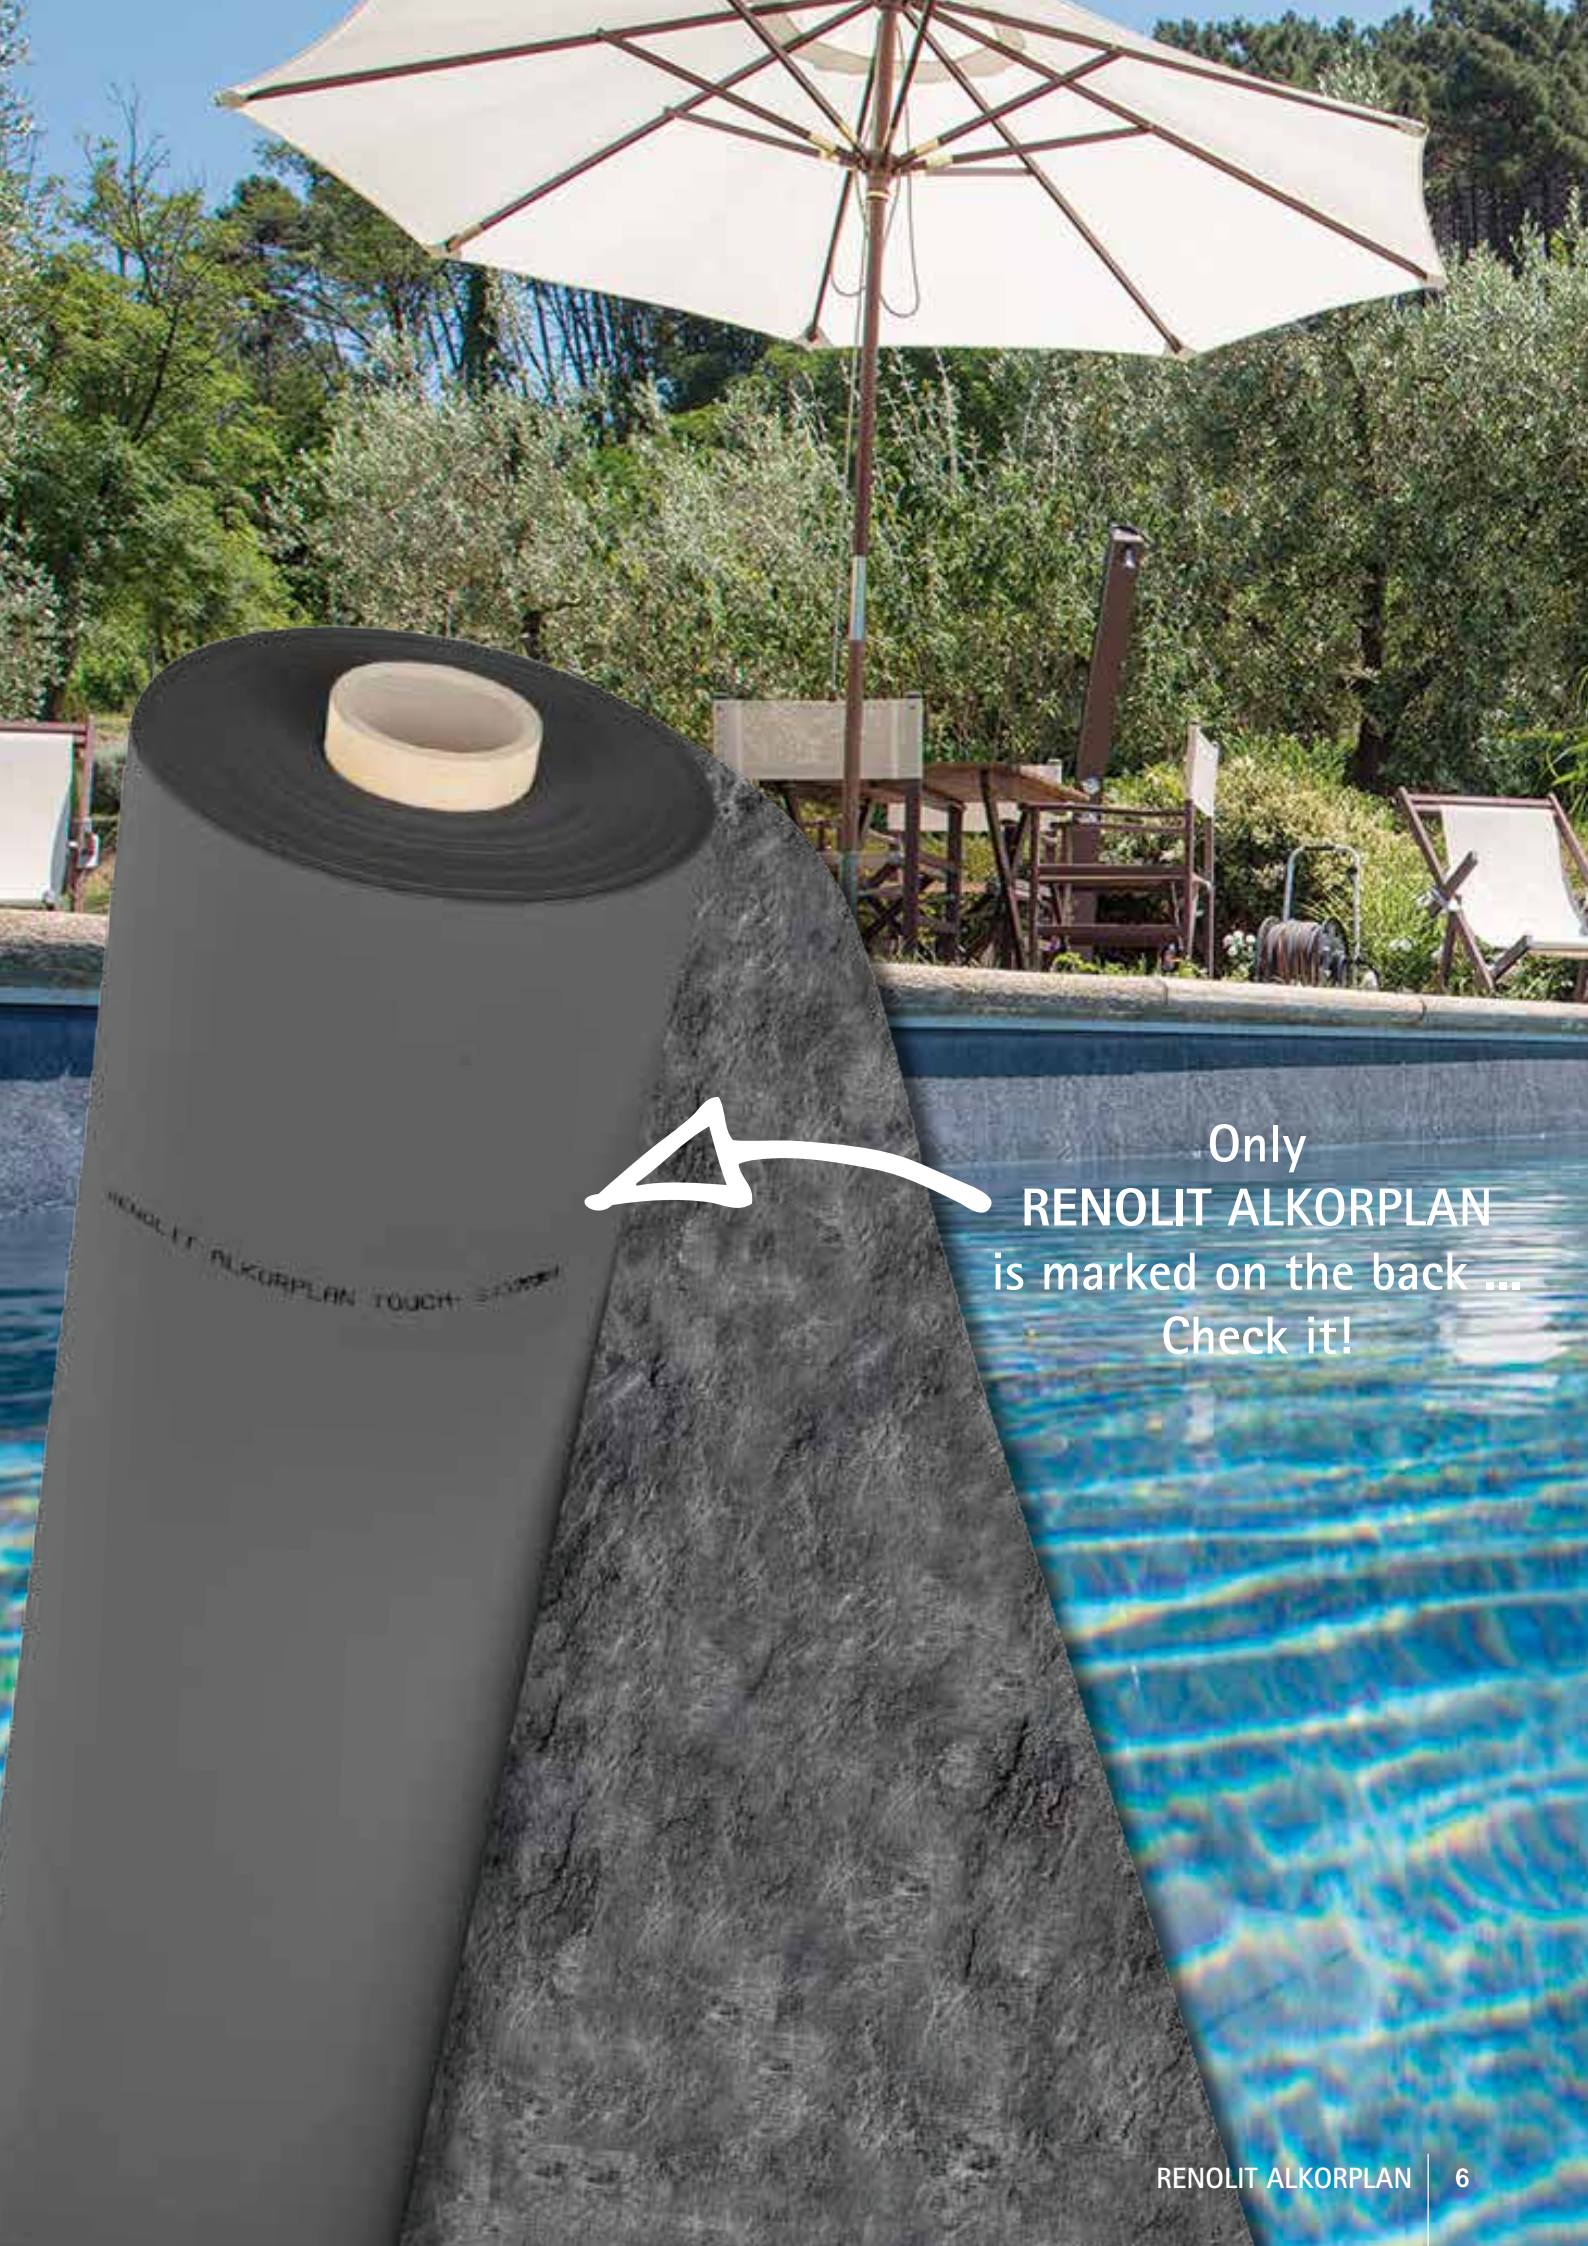

Only
RENOLIT ALKORPLAN
is marked on the back ...
Check it!

RENOLIT ALKORPLAN TOUCH 50000



in
just

4 days

Pools
15 x 12.5 m

in
just

7 days

**Fast
renovation!**

Pools
10 x 5 m

For all pool sizes and shapes!

RENOLIT ALKORPLAN TOUCH

Are you aware of
RENOLIT ALKORPLAN TOUCH?



Reinforced liner with exclusive 3D designs
and prints, inspired by nature.

RENOLIT ALKORPLAN TOUCH reinforced membrane reproduces natural textures and gives personality and character to pool linings, making them unique and original.

It's the pool liner revolution!

RENOLIT ALKORPLAN TOUCH


PREMIUM
Collection



New
2021

	Authentic	Relax	Elegance
1,65 m	35517402	35517401	35517501

New
reference!

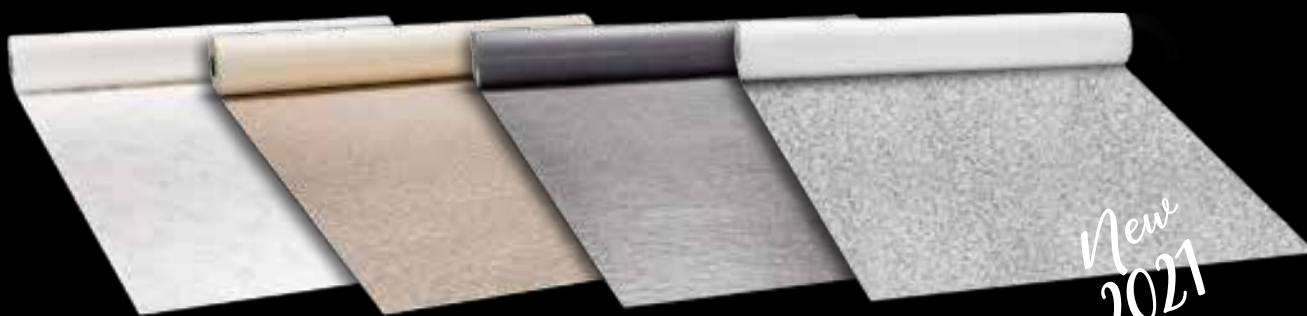

New
2021

	Vanity	Sublime	Prestige	Origin
1,65 m	35517409	35517407	35517403	35517413



2 mm reinforced laminate, printed and with relief, inspired by nature to give character and personality to swimming pools.

www.alkorplan.info/touch

Origin



RENOLIT ALKORPLAN TOUCH Origin

New
2021



RENOLIT ALKORPLAN TOUCH	Width	Thickness	Ref.
Origin	1,65 m	2 mm	35517413

Vanity




RENOLIT ALKORPLAN TOUCH Vanity



RENOLIT ALKORPLAN TOUCH	Width	Thickness	Ref.
Vanity	1,65 m	2 mm	35517409

Sublime

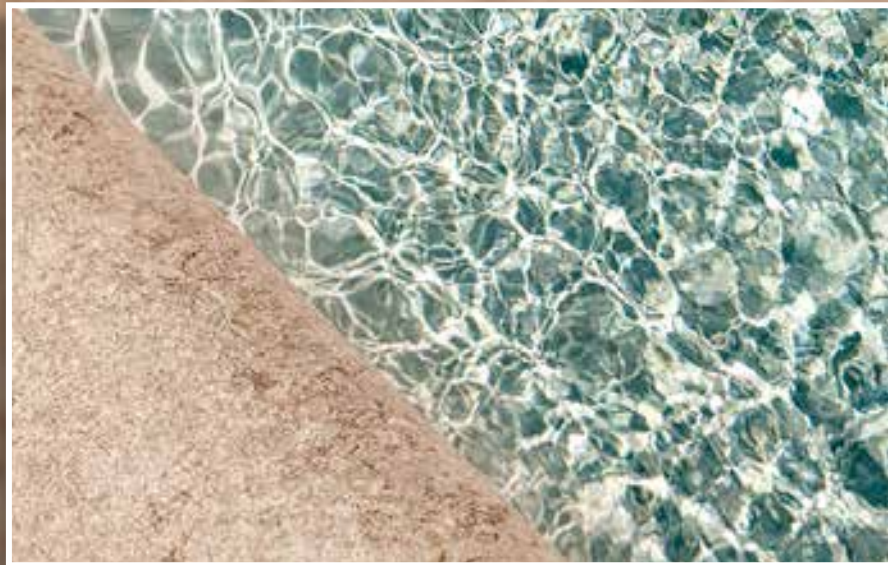

RENOLIT ALKORPLAN TOUCH Sublime



RENOLIT ALKORPLAN TOUCH	Width	Thickness	Ref.
Sublime	1,65 m	2 mm	35517407

Prestige



RENOLIT ALKORPLAN TOUCH Prestige



RENOLIT ALKORPLAN TOUCH	Width	Thickness	Ref.
Prestige	1,65 m	2 mm	35517403

Elegance



RENOLIT ALKORPLAN TOUCH Elegance

New
2021



New
reference!

RENOLIT ALKORPLAN TOUCH

Width

Thickness

Ref.

Elegance

1,65 m

2 mm

35517501

Relax



RENOLIT ALKORPLAN TOUCH Relax



RENOLIT ALKORPLAN TOUCH	Width	Thickness	Ref.
Relax	1,65 m	2 mm	35517401

Authentic



RENOLIT ALKORPLAN TOUCH Authentic



RENOLIT ALKORPLAN TOUCH	Width	Thickness	Ref.
Authentic	1,65 m	2 mm	35517402



RENOLIT ALKORPLAN CERAMICS



It looks like... but isn't!

RENOLIT ALKORPLAN CERAMICS, a 2mm embossed pool liner for swimming pools with the aesthetic appeal and texture of the mosaic tiled designs of Greek Myths.


With the most careful aesthetics and with many advantages over any existing pool liner in the market:

- 1 Guaranteed watertight.
- 2 Quick and easy installation compared to glass mosaic tiling.
- 3 No fallen tiles or crumbling grout.
- 4 Minimum maintenance.
- 5 The 2mm thickness creates a more durable and resilient membrane.
- 6 Easy to weld with an immaculate finish.



PREMIUM
Collection

RENOLIT ALKORPLAN CERAMICS

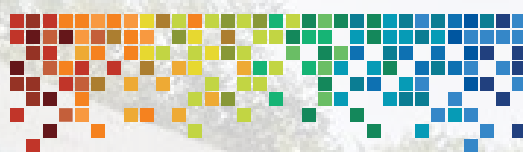

Selene

1,65 m 35617203

Etna

1,65 m 35617204



Atenea

1,65 m 35617202



2 mm laminate, printed and embossed, inspired in the mosaics of classical Greece.

www.alkorplan.info/ceramics



RENOLIT ALKORPLAN CERAMICS

Selene



Selene

RENOLIT ALKORPLAN CERAMICS	Width	Thickness	Ref.
Selene	1,65 m	2 mm	35617203



RENOLIT ALKORPLAN CERAMICS

Etna



Etna

RENOLIT ALKORPLAN CERAMICS	Width	Thickness	Ref.
Etna	1,65 m	2 mm	35617204



RENOLIT ALKORPLAN CERAMICS

Atenea




Atenea


RENOLIT ALKORPLAN CERAMICS	Width	Thickness	Ref.
Atenea	1,65 m	2 mm	35617202



RENOLIT ALKORPLAN 2000

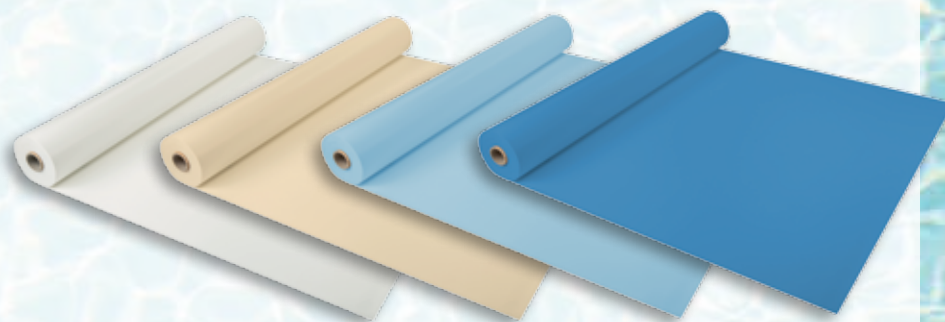

	White	Sand	Light Blue	Adriatic Blue
1,65 m	35216202	35216210	35216205	35216203
2,05 m	35216201	35216211	35216208	35216207
1,65 m Non-Slip	81116501	81116505	81116504	81116502

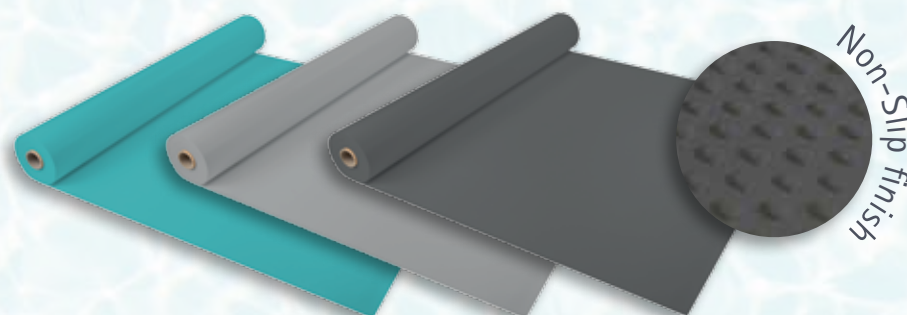

	Caribbean Green	Light Grey	Dark Grey
1,65 m	35216204	35216236	35216327
2,05 m	35216206	35216233	35216326
1,65 m Non-Slip	81116203	81116506	81122607

Lacquered 1.5 mm single colour reinforced laminate, with highly resistant pigments and durable plasticisers designed to last in a swimming pool.

GUARANTEE
WATERTIGHTNESS

10 YEARS

SAFETY FOR TOYS

EN71-3



100% SAFE

www.alkorplan.info/2000

RENOLIT ALKORPLAN2000 White



RENOLIT ALKORPLAN2000	Width	Thickness	Ref.
White	1,65 m	1,5 mm	35216202
White	2,05 m	1,5 mm	35216201
White Non-Slip	1,65 m	1,8 mm	81116501

RENOLIT ALKORPLAN2000 Sand



RENOLIT ALKORPLAN2000	Width	Thickness	Ref.
Sand	1,65 m	1,5 mm	35216210
Sand	2,05 m	1,5 mm	35216211
Sand Non-Slip	1,65 m	1,8 mm	81116505

RENOLIT ALKORPLAN2000 Light Blue



RENOLIT ALKORPLAN2000	Width	Thickness	Ref.
Light Blue	1,65 m	1,5 mm	35216205
Light Blue	2,05 m	1,5 mm	35216208
Light Blue Non-Slip	1,65 m	1,8 mm	81116504

RENOLIT ALKORPLAN2000 Adriatic Blue



RENOLIT ALKORPLAN2000	Width	Thickness	Ref.
Adriatic Blue	1,65 m	1,5 mm	35216203
Adriatic Blue	2,05 m	1,5 mm	35216207
Adriatic Blue Non-Slip	1,65 m	1,8 mm	81116502

RENOLIT ALKORPLAN2000 Caribbean Green



RENOLIT ALKORPLAN2000	Width	Thickness	Ref.
Caribbean Green	1,65 m	1,5 mm	35216204
Caribbean Green	2,05 m	1,5 mm	35216206
Caribbean Green Non-Slip	1,65 m	1,8 mm	81116203

RENOLIT ALKORPLAN2000 Light Grey



RENOLIT ALKORPLAN2000	Width	Thickness	Ref.
Light Grey	1,65 m	1,5 mm	35216236
Light Grey	2,05 m	1,5 mm	35216233
Light Grey Non-Slip	1,65 m	1,8 mm	81116506

RENOLIT ALKORPLAN2000 Dark Grey



RENOLIT ALKORPLAN2000	Width	Thickness	Ref.
Dark Grey	1,65 m	1,5 mm	35216327
Dark Grey	2,05 m	1,5 mm	35216326
Dark Grey Non-Slip	1,65 m	1,8 mm	81122607




RENOLIT ALKORPLAN 3000



	Persia Blue	Persia Sand	Bysance Blue
1,65 m	35417217	35417220	35417209
1,65 m Non-Slip	81122317		



	Carrara	Marble
1,65 m	35417214	35417213



Double-lacquered printed 1.5 mm reinforced laminate available in exclusive designs to decorate at the same time as waterproof.

GUARANTEE
WATERTIGHTNESS
10 YEARS

www.alkorplan.info/3000

RENOLIT ALKORPLAN3000 Persia Blue



RENOLIT ALKORPLAN3000	Width	Thickness	Ref.
Persia Blue	1,65 m	1,5 mm	35417217
Persia Blue Non-Slip	1,65 m	1,8 mm	81122317

RENOLIT ALKORPLAN3000 Persia Sand



RENOLIT ALKORPLAN3000	Width	Thickness	Ref.
Persia Sand	1,65 m	1,5 mm	35417220

RENOLIT ALKORPLAN3000 Bysance Blue



RENOLIT ALKORPLAN3000	Width	Thickness	Ref.
Bysance Blue	1,65 m	1,5 mm	35417209

RENOLIT ALKORPLAN3000 Carrara



RENOLIT ALKORPLAN3000	Width	Thickness	Ref.
Carrara	1,65 m	1,5 mm	35417214

RENOLIT ALKORPLAN3000 Marble



RENOLIT ALKORPLAN3000	Width	Thickness	Ref.
Marble	1,65 m	1,5 mm	35417213

Butt welding

RENOLIT recommends to practice the Butt Welding on the pool floor on **TOUCH** and **CERAMICS** membranes for an impeccable finish of your pool.

Aesthetically, especially in swimming pools made with **RENOLIT ALKORPLAN TOUCH** or **RENOLIT ALKORPLAN CERAMICS** membranes with Butt welding in the pool floor, the welds become practically invisible.



DAYTIME

Swimming pool without butt welding nor geotextile.

By day and with moving water, the welds cannot be seen.

Swimming pool without butt welding nor geotextile.



NIGHT

If this swimming pool had been installed with the butt welding system, the joints of the pool floor would have remained invisible.

NOT ALL
GEOTEXTILES ARE
THE SAME!!

NOT

ALL GEOTEXTILES ARE THE SAME!!

RENOLIT ALKORPLUS geotextile is made of blue polypropylene, which is rot-proof, and always marked with the **RENOLIT ALKORPLUS** brand.

Advantages:

- 1 The fungicide treatment prevents the proliferation of bacteria under the membrane.
- 2 The geotextile disguises any small imperfection that may exist in the structure of the substrate under the membrane.
- 3 Adds a much more comfortable feel for the bather.
- 4 Helpstomaintainthetemperature of the pool water.
- 5 Plays a key role in the butt welding system.

The
**RENOLIT
ALKORPLAN**
geotextile is one
of the essential
elements for the
butt welding.

RENOLIT ALKORPLAN geotextile is an exclusive **RENOLIT** fungicide felt that is installed under the membrane to protect it from any irregularities that the surface of the pool may have and make the bathers steps more comfortable.

Reference	Width (m)
81006005	1,50 *
81006006	1,65
81006007	2,00

*Specific for butt welding.

Advice for conserving your RENOLIT ALKORPLAN liner



Carry out a daily test to ensure the the chlorine level is 1ppm and that the pH is between 7.0-7.6

If you disinfect your swimming pool with chlorine or with a salt electrolysis machine it is essential than the level of the chlorine is 1ppm and the pH level is between 7.0 and 7.6.

If you disinfect with bromide the level should be 1ppm and the pH level between 7 and 8. Excessive use of bromide can cause the liner to become brown in colour.



If the pool has a salt chlorinator you must add stabilizer at the beginning of the season

The chlorine generated by the saline electro chlorinator is stronger than normal chlorine.

To dilute add 30ppm of a isocyanuric acid stabilizer at the beginning of the swimming pool season and check daily that level of chlorine at 1ppm and the pH between 7.0 and 7.6.

If your saline electro chlorinator does not have a RedOx chlorine controller you should use a measuring guage. Even if your pool is equipped with an automatic Redox control it is necessary to manually check the chlorine on a very regular basis (daily).

This prevents the chlorinator producing more chlorine than necessary, which could bleach the liner and irritate eyes.



It is necessary that the TA level is maintained between 100 and 175ppm

TA (total alkalinity) represents the water's capacity for neutralising acids. A balanced TA level keeps pH from fluctuating and getting out of control. A TA level under 100 ppm turns water corrosive. Damage to the liner would be irreversible.

We recommend checking the PA level weekly or after rainfall.



Protect your swimming pool in summer and winter and do not empty it

Swimming pools are built to be full of water. They should not be left empty for long periods of time.

In the summer keep the water level constant.

In winter protect skimmers and filter systems against frost. Ask a pool specialist for the best winter treatment to keep the water in perfect condition the following season. Above all cover the swimming pool in winter.





Water from wells, or of unknown origin should be analysed and, if necessary, treated before it is used to fill or top up the pool

If the water does not come from the mains supply or from a guaranteed tanker it is very probable that the water will contain diluted metals such as iron, copper or magnesium.

These minerals can react with the chemical products and produce stains on the liner.

If this happens ask a specialist to carry out a treatment with **RENOLIT ALKORPLUS Antistain**.



No chemical products should come into direct contact with the liner

The correct and safest way of introducing any chemical product into the swimming pool is by using the skimmer with the circulation pump working.

If it is powder, granules or liquid and it is required to be put directly into the swimming pool, it must be diluted before in a bucket of water, and poured into different areas of the swimming pool. The circulation pump must always be in use to prevent concentration of a product in one area.

Avoid the use of floating dispensers because they can spend too much time in the same position and can bleach the liner.



Do not use chemical products which contain copper

Always read the level of the composition of the chemical products that you use, especially those for algae.

Some anti-algae products contain copper sulphate, these should be avoided.

Use anti-algae with a quaternary ammonia base. These are the best products for your hair and your skin. If by accident you have used a product containing copper, you should apply **RENOLIT ALKORPLUS Antistain**.



Avoid a build up of dirt and calcareous deposits on the waterline

The lacquer that protects the **RENOLIT ALKORPLAN** laminate will repel dirt; however, low maintenance and high bathing loads will accelerate the build up of waterline deposits.

Regular cleaning of the waterline with **RENOLIT ALKORCLEAN** applied with a sponge or cloth will prevent the build up of grease and scale and avoid permanent staining.



Never use abrasive tools or aggressive cleaning products

Do not use aggressive chemical products or cleaning equipment, such as solvents; brushes with wire or stiff bristles; and abrasive pads or cloths that will damage the membrane. The liner is coated with a protective lacquer which is stain and dirt resistant, however it may be damaged if cleaned with abrasive materials or solvents.

RENOLIT ALKORCLEAN is an ideal and efficient cleaner for your liner. It may be ordered through your Swimming Pool Specialist.

